


# SPECIAL CABLES FOR MEDICAL TECHNOLOGY

THE RIGHT SOLUTION FOR EACH AREA

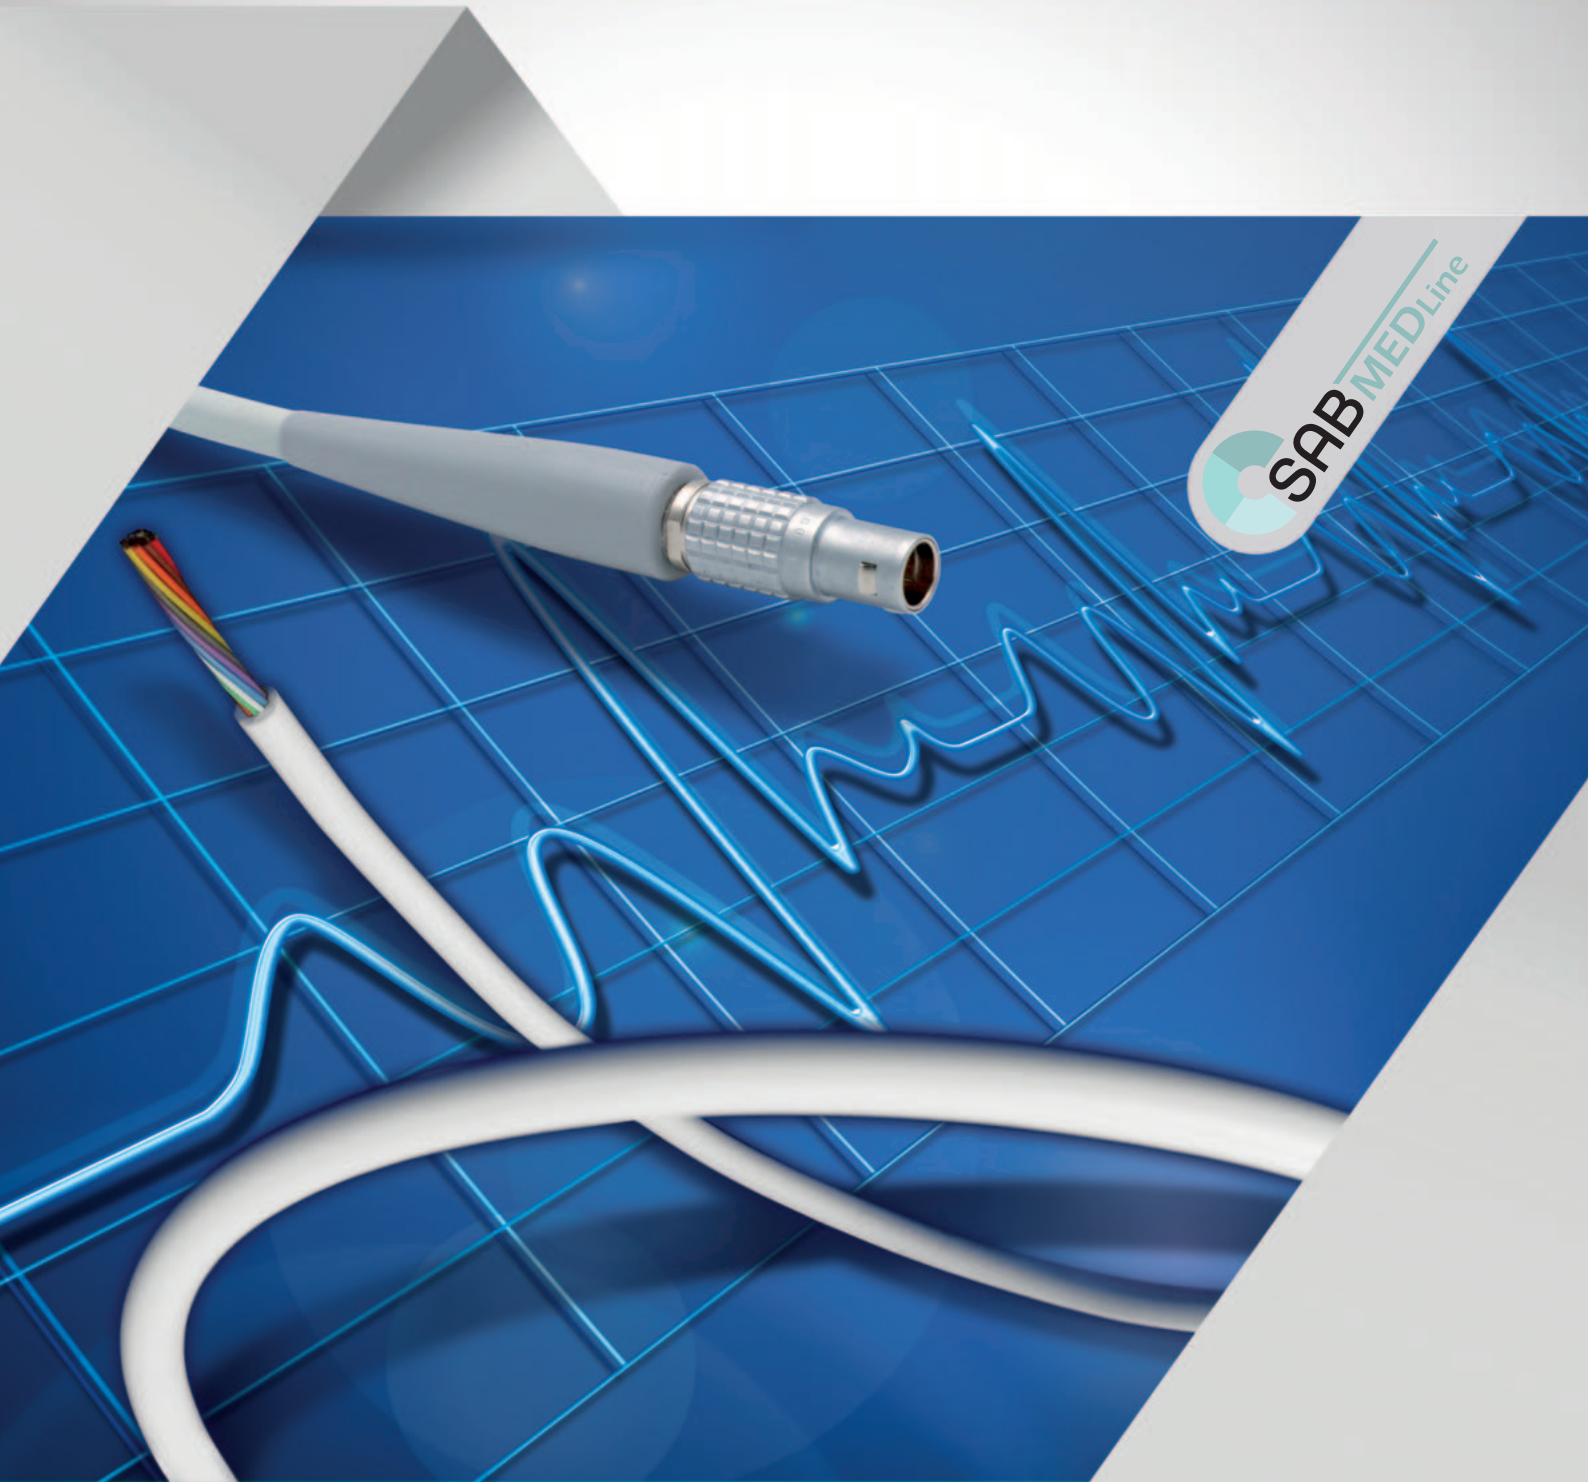

SAB MEDLine

[www.sab-cable.com](http://www.sab-cable.com)



TRADITIONAL  
FAMILY BUSINESS  
SINCE **1947**



Peter Brückskes sen.




Sabine Brückskes-Wetten



Peter Brückskes






## CONTENT

<b>Who we are</b> .....	4
<b>Cables for medical technology</b>	
■ <b>Cable design and production</b>	
➤ Your specialist for cables and wires as well as harnessing for medical technology .....	5
■ <b>Production possibilities</b>	
➤ Flexible cables and wires "Made in Germany" .....	
➤ Cable harnessing directly from the manufacturer SAB .....	6
■ <b>Selection table</b> .....	7
■ <b>Product overview</b>	
➤ Electrotherapy .....	8-9
➤ Surgery .....	10-11
➤ Imaging .....	12-13
➤ Aesthetics .....	14-15
➤ Dental technology .....	16
■ <b>audited / tested / approved</b> .....	17
■ <b>Sales and service worldwide</b> .....	18-19



The examples listed below show only a selection of our possibilities. For other solutions our experts are always at your disposal. Please do not hesitate to contact our specialists who will advise you individually for your special application.

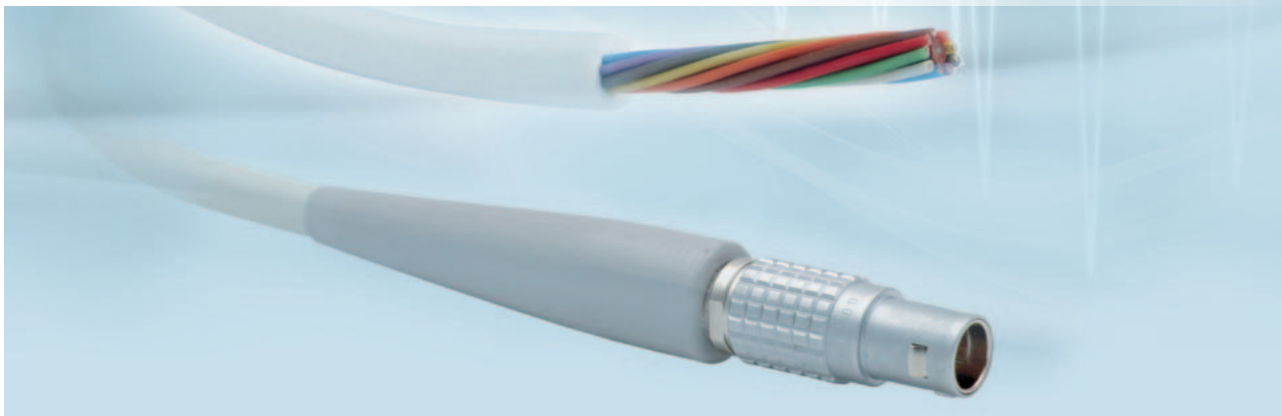

## FAMILY BUSINESS IN THE THIRD GENERATION

75 years of experience in cable and wire manufacturing as well as in temperature measurement technology turned a one-man business into a company with more than 550 employees. We prove our strength every year with more than 1500 special products according to customers' requirements. Each product is a new challenge for our creative technical team. We at **SAB** see ourselves as a manufacturer and a service provider – in the sense of true partnership and the greatest possible customer orientation.

Today, the quality of our products is known and appreciated in more than 100 countries around the world. In all product ranges, we are certified according to DIN EN ISO 9001. Furthermore, we have implemented an environmental management system for our company according to DIN EN ISO 14001, an occupational health and safety management system according to NLF/ILO-OSH and DIN ISO 45001, and an energy management system according to DIN EN ISO 50001.

And also for the future, our slogan is: **"WE GO FORWARD!"**

FOUNDED:	1947 by Peter Bröckskes sen. an independent, medium-sized company.
CEO:	Peter Bröckskes and Sabine Bröckskes-Wetten
PLANT/LOCATION:	In Viersen (Lower Rhine) 110.000 m <sup>2</sup> company site.  Own manufacturing from copper conductor to outer sheath.  VDE approved burnchamber and laboratory within the company.
EMPLOYEES/WORKERS:	approx. 430 at the plant in Viersen, 550 worldwide
YEARLY SALES:	over 134 Mio. € worldwide
PRODUCTS:	Special Cables  Measurement Technology  Cable Harnessing
CERTIFICATES AND APPROVALS:	Quality management system acc. to DIN EN ISO 9001 for every manufacturing field  Environmental management system acc. to DIN EN ISO 14001  Occupational health and safety management acc. to NLF/ILO-OSH and DIN ISO 45001  Energy management system acc. to DIN EN ISO 50001



## CABLE DESIGN AND PRODUCTION

### SAB BRÖCKSKES – Your specialist in connection technology for electromedicine

In order to identify customer-specific requirements and to enable safe applications, the cable specialist from Viersen with its own development department relies on close customer contact. As the complete production is carried out exclusively on series production equipment, each prototype is also a series product suitable for presentation to the notified body. Measurements can be carried out under real conditions on both the metre goods - already possible from 100m upwards - and the cable assemblies. The subsequent exchange of knowledge and - if required - the subsequent practical implementation in design features are elementarily important for a continuously successful application.

*Please contact us directly:  
[m.gerlatzek@sab-cable.com](mailto:m.gerlatzek@sab-cable.com)*



## PRODUCTION POSSIBILITIES

### Flexible cables and wires "Made in Germany"

As a leading manufacturer we develop and produce cables for industrial purposes. Our wide range of materials offers a lot of possibilities for your individual product requirement. The following survey shows an extract of our production possibilities:

#### Conductor Materials:

- ✓ bare copper
- ✓ tinned copper
- ✓ silver-plated copper
- ✓ nickel-plated copper

#### Insulation and Jacketing Materials:

- ✓ SABmed S
- ✓ SABmed T
- ✓ FEP, PFA
- ✓ Polyethylene
- ✓ TPE
- ✓ Polyurethane

#### Temperature Ranges:

- SABmed S
- ✓ -40°C up to +180°C
- SABmed T
- ✓ -40°C up to +100°C
- Polyurethane
- ✓ -40°C up to +90°C
- FEP, ETFE, PFA
- ✓ -90°C up to +260°C



#### Conductors:


- ✓ cross sections 0,022 - 300 mm<sup>2</sup>
- ✓ unshielded and shielded over 100 conductors

#### Cable harnessing directly from the manufacturer SAB:

As a full service partner we are able to offer besides cable design and production the manufacturing of cable harnessing products according to customer's request. Please trust on our experience for decades in the treatment of cables and connectors.

- ✓ cable harness according to customer's demands
- ✓ complete cable harness
- ✓ UL certified assemblies
- ✓ helix cables
- ✓ USB as well as CAT cables

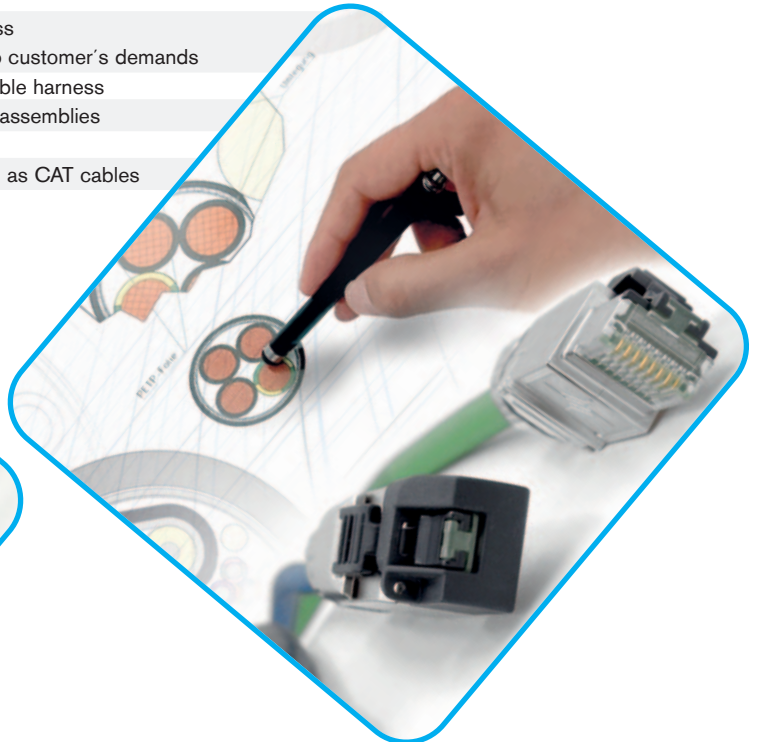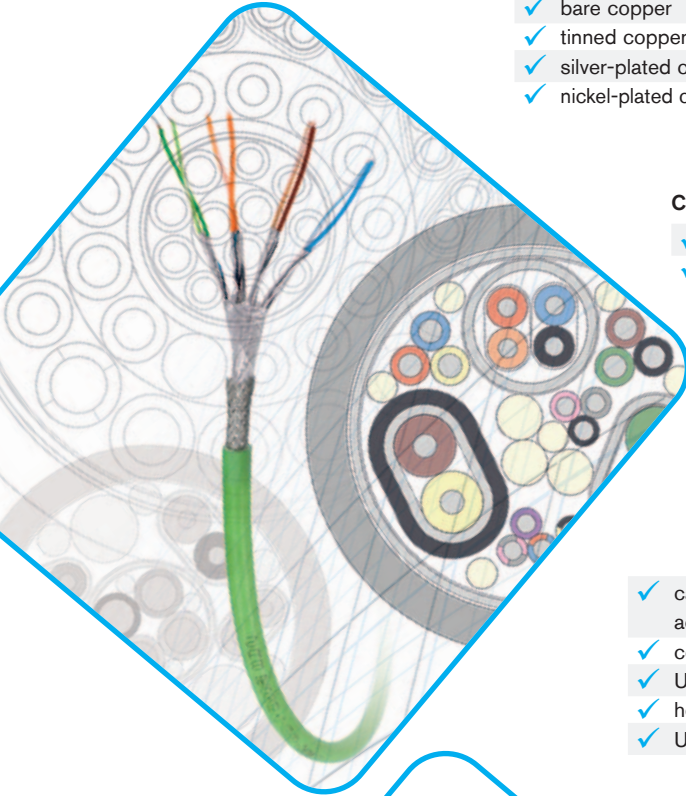




## SELECTION TABLE

Our **SABmed T-range** is characterized by a reduced shore-hardness making the cable smoother and more flexible than PVC. Furthermore, this material is free of halogen and very good for sterilization (gas and radiation) as well as for a helix cable!

	Item group: 3900 Sheath material: SABmed S	Item group: 3901 Sheath material: SABmed T	Item group: 3902 Sheath material: variable	Item group: 3903 Sheath material: variable
Biocompatibility (ISO 10993-5)	X	X	X	
Wipe disinfection*	X	X	X	X
Autoclavability (up to ±134°C)	X			
High flexibility	X	X	X	X
Spiralisation**		X	X	X
Overmoulding	X	X	X	X
Low adhesion	X	X	X	X
Temperature range +90°C	X	X	X	X
Temperature range +180°C	X			
UL/CSA	X		X	X
RoHS	X	X	X	X

\*against commercially available wipe disinfections according to instructions for use

\*\*depending on the material combination



## ELECTROTHERAPY

Connection cables in the field of electrotherapy application with electric stimulation can be customer-specific designed and manufactured by SAB Bröckskes. Depending on the application and the customer's demands, we would be glad to consider the request for an especially flexible and motion-friendly performance, a resistance against wipe-disinfection or a space-saving hybrid cable. We are waiting for your challenge. Also cable harnessing is possible.



### TECHNICAL DATA

### SABmed S CONNECTING CABLE

#### CABLE CONSTRUCTION

<b>Conductor:</b>	finely-stranded, silver-plated copper
<b>Insulation:</b>	FEP
<b>Screen:</b>	highly-efficient tinned copper braid
<b>Sheath material:</b>	biocompatible SABmed S

#### CABLE CHARACTERISTICS

<b>Voltage:</b>	up to 50 V
<b>Temperature range:</b>	-40°C/+180°C
<b>Testing voltage:</b>	selection test acc. to 2 MOP
<b>Cleaning:</b>	autoclavable, standard wipe disinfection
<b>Surface:</b>	„non-sticky“



Shock wave ✓

Ultrasound ✓


Stimulation current ✓



**BIOCOMPATIBLE**

**PLIABLE**






## SURGERY

Whether for monopolar, bipolar application technology or electrical devices for other specialised surgical procedures - manufacturing at SAB Bröckskes is always carried out to the highest quality standards, taking into account biocompatible materials. Versions with increased shielding to prevent interference with imaging systems can also be manufactured. The requirements for protective measures for electrical safety, such as MOOP and MOPP, are also included and tested.



### TECHNICAL DATA

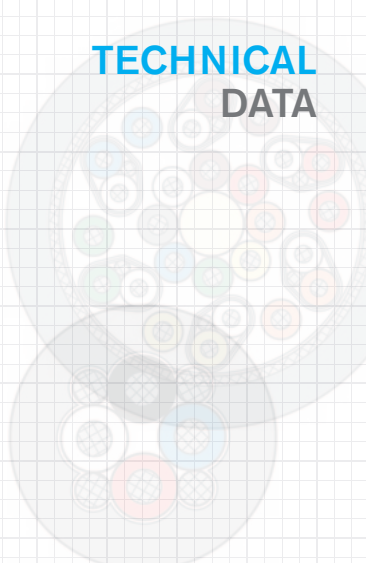

### HF SABmed S POWER SUPPLY CABLE

#### TYPICAL CABLE CONSTRUCTION

<b>Conductor:</b>	finely-stranded, silver-plated copper
<b>Insulation:</b>	FEP
<b>Screen:</b>	highly-efficient tinned copper braid
<b>Sheath material:</b>	biocompatible SABmed S


#### TYPICAL CABLE CHARACTERISTICS

<b>Voltage:</b>	up to 900 V
<b>Temperature range:</b>	-40°C/+180°C
<b>Testing voltage:</b>	selection test acc. to 2 MOP
<b>Cleaning:</b>	autoclavable, standard wipe disinfection
<b>Surface:</b>	„non-sticky“
<b>Application:</b>	permanent bending and torsion



- Coagulation ✓
- Orthopaedics ✓
- Ophthalmology ✓
- Surgery robots ✓
- Operating tables ✓


**UL approved**



**USB 2.0  
3.0**

**2 MOP tested**






## IMAGING TECHNIQUES

Imaging systems are an integral part of medical diagnostics and surgical treatments. A brilliant image display is crucial for targeted and successful therapy. This means that the demand for ever faster transmission systems and interference-minimised display devices also poses great challenges for the designers of imaging procedures when it comes to cable selection. Our strength in customised solutions is particularly evident in the innovative implementation of your application. Whether hybrid cables with KOAX elements or specially electrically shielded products with permanently flexible properties - we can produce from as little as 100 m.



### TECHNICAL DATA

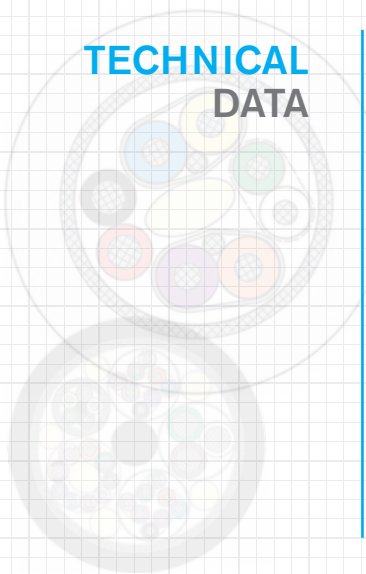

### SABmed T USB 3.0 Gen 1 DATA CABLE

#### CABLE CONSTRUCTION

<b>Conductor:</b>	finely-stranded, silver-plated copper
<b>Insulation:</b>	FEP
<b>Stranding:</b>	highest precise, homogenized stranding
<b>Screen:</b>	highly-efficient tinned copper braid
<b>Sheath material:</b>	biocompatible SABmed T

#### CABLE CHARACTERISTICS

<b>Voltage:</b>	up to 90 V
<b>Temperature range:</b>	-40°C/+100°C
<b>Testing voltage:</b>	selection test acc. to 2 MOP
<b>Cleaning:</b>	standard wipe disinfection, ETO
<b>Surface:</b>	„non-sticky“
<b>Harness:</b>	upgraded for individual connectors



Ultrasound ✓

Microscopy ✓

Endoscopy ✓


Monitoring ✓

**NON-STICKY**

**AUTOCLAVABLE**

PETP-Folie

Umlegung



## AESTHETICS

Imaging systems for medical diagnostic require a reliable connection of transmission. SAB Bröckskes offers a variety of possibilities to fulfil your demands. Our strength of the custom-made solution becomes particularly clear in the innovative realization of your application. Whether hybrid cables with COAX-elements or special electrical screened products with high flexible performance - often we are already able to produce for a quantity of 100 m.



### TECHNICAL DATA


### BIOCOMPATIBLE HYBRID CABLE

#### CABLE CONSTRUCTION

<b>Conductor:</b>	finely-stranded conductor
<b>Insulation:</b>	SABIX®
<b>Stranding:</b>	hybrid combination with different tubes
<b>Screen:</b>	highly-efficient tinned or silver copper braid
<b>Sheath material:</b>	PU

#### CABLE CHARACTERISTICS

<b>Voltage:</b>	up to 375 V
<b>Temperature range:</b>	-40°C/ +80°C
<b>Testing voltage:</b>	selection test acc. to 2 MOP
<b>Cleaning:</b>	standard wipe disinfection
<b>Surface:</b>	„non-sticky“
<b>Application:</b>	mechanical sophisticated, cross-pressure stable

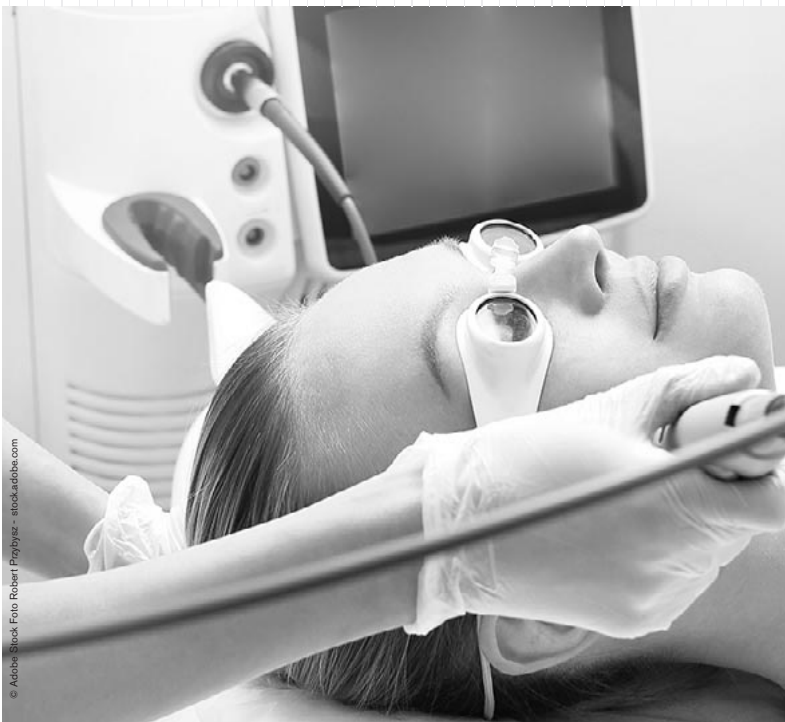

© Aubin Stock Foto Robert Przybyz - stock.adobe.com

Liposuction ✓


Skin-abrasion ✓

Laser technology ✓



**CUSTOMISED**

**PROTOTYPES**




## DENTAL TECHNOLOGY

The performance demands of dental technology ranges from flexible and smooth silicone cables in handheld applications and torsional stress at swivel arms to miniaturised connection cables. Due to the wide range of material combinations we fulfil your demands at the highest level.



### TECHNICAL DATA

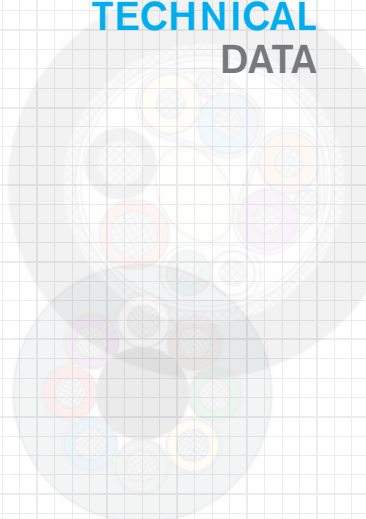

### BIOCOMPATIBLE DRIVE CABLE

#### CABLE CONSTRUCTION

<b>Conductor:</b>	finely-stranded, silver-plated copper
<b>Insulation:</b>	FEP or PFA
<b>Screen:</b>	highly-efficient tinned or silver copper braid
<b>Sheath material:</b>	biocompatible SABmed S

#### CABLE CHARACTERISTICS

<b>Voltage:</b>	up to 900 V
<b>Temperature range:</b>	-40°C/+180°C
<b>Testing voltage:</b>	selection test acc. to 2 MOP
<b>Cleaning:</b>	autoclavable, standard wipe disinfection
<b>Surface:</b>	„non-sticky“
<b>Application:</b>	permanent bending and torsion



© Robert Kreusche / Fotolia

Drive cable ✓


Treatment unit ✓

Intraoral camera ✓



## AUDITED / TESTED / APPROVED

Our modern testing machines make it possible to reproduce almost all customer-specific requirements. In this way, we ensure that all products are fully developed when they come onto the market. For us, new products are the result of close communication between customer, sales, development department, laboratory and raw material supplier. In addition, SAB has all the test procedures required by the VDE as well as numerous international certifications.

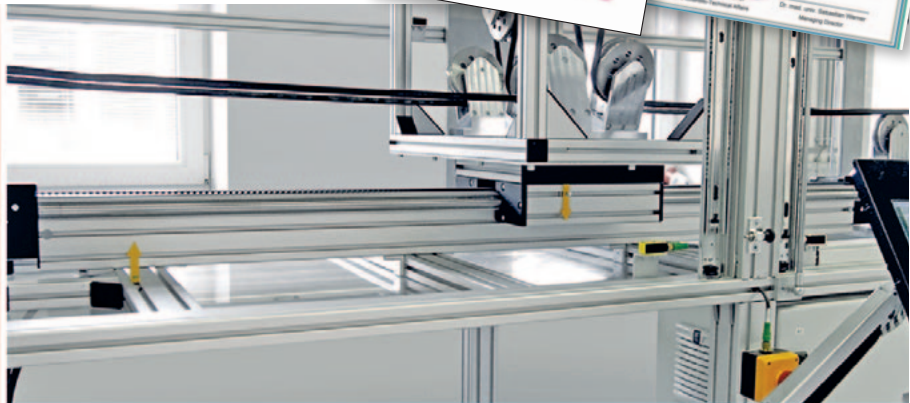

Test laboratory ✓

Biocompatibility ✓  
acc. to EN ISO 10993-1

Cable Harnessing ✓  
UL certified



# SALES AND SERVICE

From our central stock in Viersen-Süchteln or our external stocks, we supply standard lengths as well as special dimensions, often within 24 hours. It is our strength to be at different places at the same time. This shows also our wide product range. Being always ready to deliver our products of constant quality is our strength at SAB Bröckskes. Challenge, obligation - but also guarantee at the same time. This is your advantage - we are present whenever you need our assistance.



## ● HEAD OFFICE

### Germany

**SAB Bröckskes GmbH & Co. KG**  
Grefrather Str. 204-212 b  
41749 Viersen  
Germany  
Phone +49 (0) 2162 898-0  
info@sab-cable.com  
www.sab-kabel.de

## ● SUBSIDIARY

### France (east)

**Câblerie SAB S.A.**  
28, rue des Caillottes  
Z.I. La Plaine des Isles  
89000 Auxerre  
France  
Phone +33 3 869 466 94  
info@cablerie-sab.fr  
www.sab-cable.eu

## ● SUBSIDIARY

### USA

**SAB North America**  
344 Kaplan Drive  
Fairfield, NJ 07004  
USA  
Phone +1 973 276 0500  
info@sabcable.com  
www.sabcable.com

## ● REPRESENTATION

### Korea

**TCC Thomas Cable Co. Ltd.**  
206 Yeocheon 3-gil, Ochang-eup  
Cheongwon-gu, Cheongju-si  
Chungcheongbuk-do  
28127, South Korea  
Phone + 82 43 211 9900  
thomascable@thomaskorea.com  
www.thomas.co.kr

## ● SUBSIDIARY

### Netherlands

**SAB Bröckskes Benelux**  
Bokkerijder 34  
5571 MX Bergeijk  
Netherlands  
Phone +31 (0) 497 575 201  
info@brockskes.nl  
www.nl.sab-kabel.com

## ● SUBSIDIARY

### France (west)

**Auxicom**  
3 rue de la Lagune  
Parc d'Activités de Viais  
44860 Pont Saint Martin  
France  
Phone +33 2 518 976 76  
info@auxicom.fr  
www.auxicom.fr

## ● SUBSIDIARY

### China

**SAB Special Cable  
(Shanghai) Co. Ltd.**  
Room 706,  
Tower C. Bo Hui Plaza Nr. 768  
South Zhongshan 1st Road,  
Huangpu District, Shanghai, China  
Phone + 86 21 583 508 43  
sales@sab-broeckskes.net  
www.sab-cable.cn

## ● REPRESENTATION

### India

**Alltronix**  
No. C-340, 6th Cross, 1st Stage,  
Peenya Industrial Estate,  
Bengaluru - 560 058, Karnataka  
India  
Phone +91 80 40838383  
mail@alltronix.com  
www.alltronix.com

# WORLDWIDE

Here you will find the right contact worldwide for your service request.



## ● REPRESENTATION

### Singapore

Precision Technologies Pte Ltd  
211 Henderson Road #13 - 02  
Henderson Industrial Park  
Singapore 159552  
Phone +65 6273 4573  
precision@pretech.com.sg  
www.pretech.com.sg

## ● REPRESENTATION

### Temperature measurement Belgium

Ets. Fabritius SPRL  
Av. van Volxem 180  
1190 Brussels  
Belgium  
Phone +32 2 34 33 932  
info@fabritius.be  
www.fabritius.be

## ● REPRESENTATION

### Japan

JEPICO Corporation  
Shinjuku Front Tower  
21-1, Kita-Shinjuku 2-Chome  
Shinjuku-Ku, Tokyo 169-0074  
Japan  
Phone +81 3 6362 9612  
m\_suzuki@jepico.co.jp  
www.jepico.co.jp/english

## ● REPRESENTATION

### Sweden

OEM Automatic AB  
Dalagatan 4  
573 42 Tranas  
Sweden  
Phone +46 75 242 41 00  
info@oem.se  
www.oem.se/en

## ● REPRESENTATION

### Poland

Kabel-Projekt  
Podkomorzego 3/15  
83-000 Pruszcz Gdański  
Poland  
Phone + 48 602 211 405  
krzysztof.pilip@kabel-projekt.com  
www.kabel-projekt.pl

## ● REPRESENTATION


### Israel

TransElectric  
27 Shaked Street,  
Hevel Modiin Industrial Park  
7319900 Shoham  
Israel  
Phone +972 73 2336600  
info-tig@ti-group.co.il  
ti-group.co.il

## ● REPRESENTATION

### Finland

OEM Finland Oy  
Cable Department  
Fiskarsinkatu 3  
20750 Turku, Finland  
Phone +358 207 499 499  
info@oem.fi  
www.oem.fi

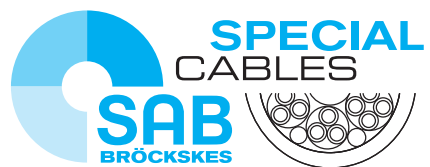

**SAB** Bröckskes GmbH & Co. KG

Grefrather Str. 204 - 212 b

41749 Viersen · GERMANY

Tel.: +49/2162/898-0

Fax: +49/2162/898-101

[www.sab-cable.com](http://www.sab-cable.com)

[info@sab-cable.com](mailto:info@sab-cable.com)